



+ Different slave clock variations available on request

Custom-made products by combining the variants shown are possible on request.

Please contact our Sales team on the phone number:

+49 80 61-3501-0


- + Special designs and sizes available on request
- + All clocks are also available with ball impact protection (safety glass + 3-point attachment)
- + Available housing materials: ABS plastic, aluminum or stainless steel
- + Version available for indoor or outdoor use

clock face variants:





round

wall mounting (one sided)




round

wall or ceiling mounting (double sided)




square

wall mounting (one sided)



square

wall or ceiling mounting (double sided)



NUR-302DW/DD
NUR-402DW/DD
(incl. wall bracket)



Description

The analogue slave clocks can be operated indoor in combination with the system clock PTC-240D from the RCS VARES-3000 system. With the classic design, this slave clocks can be integrated harmoniously into each architecture.


The one-sided clock variant can be hung up with a single-point fixing to the wall.

In the double-sided version two one-sided clocks with a wall bracket are assembled together..

Please consider the following features:

- One-sided for mounting on the wall with a single-point attachment.
- Clockwork: 24V DC, 1/1 minute impulse.
- 24V DC pole changing minute impulse, 7.5 mA current consumption.

- Single-sided clocks for wall or ceiling mounting is composed of a clock with back wall and a wall bracket
- Watch dial models with Arabic numerals. Other design e.g. without numbers or with red second hand is available on request.
- Additional slave clocks in square, ball-punched or metal versions are available on request.

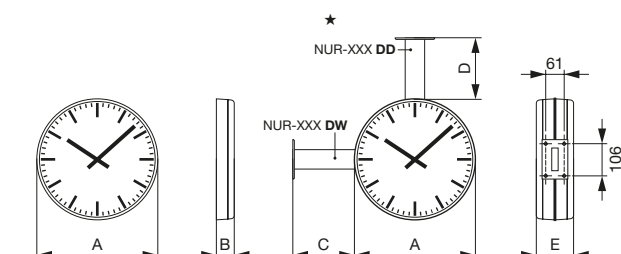

Modells	A	B	C	D	E
NUR-302 / NUR-302XX	Ø 300/304 mm	45 mm	100 mm	200 mm	93 mm
NUR-402 / NUR-402XX	Ø 400/406 mm	58 mm	100 mm	200 mm	119 mm

Technical data	NUR-302	NUR-302 DD / DW	NUR-402	NUR-402 DD / DW
Control	24V DC pole changing minute pulse, 7.5 mA current consumption			
Insulation class	IP 52			
Pulse length	1/1 minute pulse			
Dial	white acrylic glass dial, black lettering (Arabic numerals)			
Housing color	white			
Material	high-quality ABS plastic with acrylic glass cover, wall bracket made of stainless steel			
Diameter Ø	300 mm	304 mm	400 mm	406 mm
Case depth	45 mm	93 mm	58 mm	119 mm
Weight	0,7 kg	2,9 kg	1,2 kg	4,25 kg

Model designation

Slave Clock, Ø 300 mm, one-sided, analogue, Dial Arabic numerals, 24V **NUR-302**

Slave Clock, Ø 300 mm, double-sided, analogue, Dial Arabic numerals, 24V, incl. ceiling bracket **NUR-302 DD**

Slave Clock, Ø 300 mm, double-sided, analogue, Dial Arabic numerals, 24V, incl. wall bracket **NUR-302 DW**

Slave Clock, Ø 400 mm, one-sided, analogue, Dial Arabic numerals, 24V **NUR-402**

Slave Clock, Ø 400 mm, double-sided, analogue, Dial Arabic numerals, 24V, incl. ceiling bracket **NUR-402 DD**

Slave Clock, Ø 400 mm, double-sided, analogue, Dial Arabic numerals, 24V, incl. wall bracket **NUR-402 DW**