

## Fire Brigade Call Station




In addition to the monitored microphone, the station ELM-106 can be used.

### Description

The call station is electronically monitored compliant to **VDE 0828/IEC 50849**. Measured values of the microphone cap, the entire signal path and the press-to-talk bar are detected and analysed. The direct connection with VARES is made by a 4-pin shielded cable. The stable "slim" desktop housing has a functional design. It is suitably coloured for the specially targeted application.

**VARES Fire Brigade Call Station** ..... **ESM-100D**

## VARES Software Languages

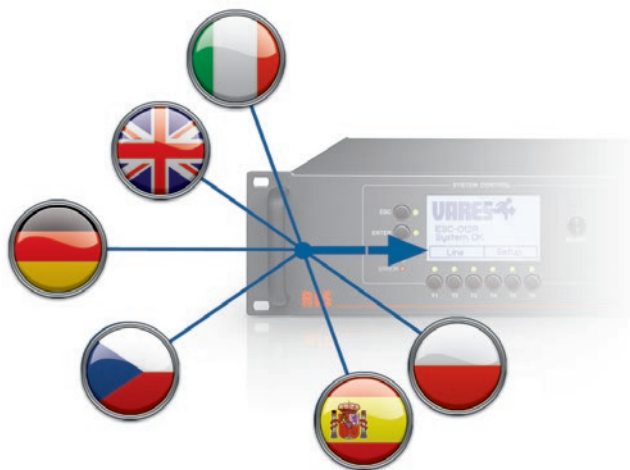

### VARES Language Options

As alternatives to English and German ESC-012A offers a variety of menu languages as options:

1. German (factory setting, at no extra charge)
2. English **ESL-001/2**
3. Czech **ESL-001/3**
4. Spanish **ESL-001/4**
5. Italian **ESL-001/5**
6. Polish **ESL-001/6**

**VARES Software Language** ..... **ESL-001/X**  
 (Please replace the „X“ by corresponding last digits, at ordering)

## Fire Brigade Handheld Mic



### Description

The handheld microphone is electronically monitored compliant to **VDE 0828/IEC 50849**. Measured values of the microphone cap, the entire signal path and the press-to-talk bar are detected and analysed.

The direct connection with VARES is made by a 4-pin shielded cable. The handy, coloured housing with its lateral press-to-talk bar is optimized for its special purposes.

**VARES Fire Brigade Handheld Mic** ..... **ESM-020H**

## Housing and Mounting Panel for ESM-020H



### Description

**The Mounting Panel VMF-020A** for the fire brigade microphone ESM-020H provides installation in a standard housing according to **DIN 14661** and **DIN 14662** and can thus be integrated in a fire control panel.

**The housing VCF-020A** is optional, if no fire brigade control panel is available. It is designed as a standard housing according to **DIN 14661** and **DIN 14662**, in red (RAL 3000). The housing with transparent door, lockable with on-site fire brigade profile half cylinder according to DIN 18252.

- Protection type: IP40, DIN 40050
- Surface design according to DIN 14663
- The ESM-020H is part of the certification to EN 54-16

**Mounting Panel**, for ESM-020H ..... **VMF-020A**  
**Housing**, for ESM-020H (without mounting panel) ..... **VCF-020A**  
 Dimensions (WxHxD): 250x180x60 mm, 4 kg