


# „Design“-CABINET SPEAKER (with rear panel)

**RCS**



100 V

PASSIVE

ACTIVE

**6W** Adaptions 1,5/3/6W  
**10W** Adaptions 2,5/5/10W



## Description


This cabinet speaker captivates by its remarkable innovative design. The symmetrical shape adapts to all premises in the best way. It can also be used as a ceiling speaker.

Whilst developing this speaker, we put great effort into the functionality and stability. Therefore it is offered in many variations, optionally moisture proof impregnated.

Excellent playback quality and sounding truth.

Please consider the following features:

- The BCR series is supplied **with a rear panel**.
- Supplied with high-quality broadband chassis.
- The speaker can be installed both horizontally and vertically.
- Easy attachment of the 100V-line by external screw-type terminal.

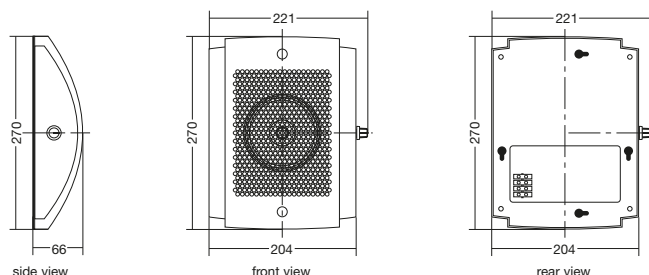

## Model designations (with rear panel)


**Design-Cabinet Speaker 6 W**, 100V transf., rear panel. **BCR-006**  
**Design-Cabinet Speaker 10 W**, 100V transf., rear panel. **BCR-010**

## Models with inserted control:

These cabinet speakers are also available with an inserted volume control.

The control is laterally attached and is adjusted by turning the installed knob.

★

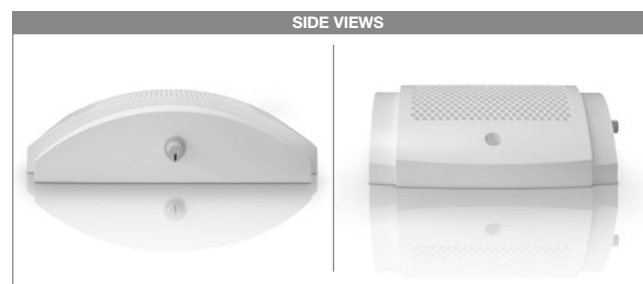

Technical data	BCR-006 (R)	BCR-010 (R)
Load rating (Music power)	6 (15) W	10 (15) W
Transformer tapings at 100V	6 / 3 / 1,5 W	10 / 5 / 2,5 W
Frequency range (Hz)	150 – 20.000 Hz	150 – 20.000 Hz
Sound pressure at 1W/1m	94 dB	94,5 dB
Sound pressure SPL Pmax/1m	103 dB @1,3kHz	105 dB @1,3kHz
Angle of refl. beam (-6dB) 1/4/8 kHz	180°/ 70°/ 40°	180°/ 60°/ 50°
Speaker Ø (mm) and Impedance	130/ 8 ohms	130/ 8 ohms
Dimensions HxWxD (mm)	270 x 204 (221) x 66	270 x 204 (221) x 66
Weight (kg)	approx. 1,1	approx. 1,1

## Model designations (with rear panel)

**Design-Cabinet Speaker 6 W**, 100V, r. panel, contr. **BCR-006 R**  
**Design-Cabinet Speaker 10 W**, 100V, r. panel, contr. **BCR-010 R**