

Description

With the PSS-024 A, 24 differently programmed background music zones can be switched on and off manually. Thus each individual button of the PSS-024 A may be assigned to one relay of the control center. Groups of speaker lines can be programmed for each individual button.

The straight forward programming of the individual buttons is carried out through the computer software ConfigV3000.


Please consider the following features:

- Up to 3 program control panels PSS-024 A may be operated from the control center.
- Connection of the program control panels similar to extension unit through extension cable PFK-200 onto the SLAVE-connection PSS-224 C.
- The program control panel PSS-024 A may additionally be removed from the 19" rack through an additional internal bus module PBS-400 A. Thus it may be used remotely on any spot of the VARES-3000 bus.
- Connection to a bus- connector socket PBA-300 B through connector cable PMC-003.
- The bus connection may be monitored via the control center PSS-224 C. The actual monitoring function can be switched on or off via ConfigV3000.

- Each button can be programmed for groups of speaker lines or individual speaker lines through ConfigV3000.

★

Keypad Field PKF-024 A

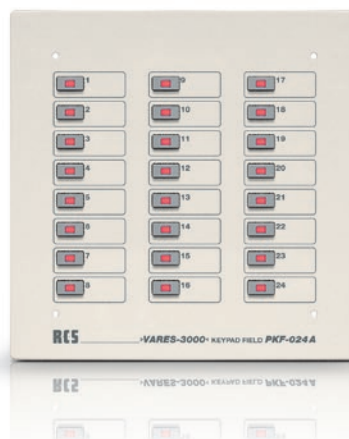

The PKF-024 A is a keyboard for flush wall-mounting with VARES bus connection. With 24 lighted keys it can be used for switching from background music zones that were previously programmed via the software „ConfigV3000“ in the device.

The PKF-024 A functionally equivalent approximately to the program switching field PSS-024 A for 19" rack mount and enabled sleep status of zones in a PSS-224 C. There are up to 4 devices simultaneously on VARES bus usable.

„VARES-3000“ Keypad Field, 24 keys **PKF-024 A**
Dimensions (WxHxD) 182 x 182 x 40 mm

Flus-mount housing, for flush mounting of the PKF-024 A. ... **UPG-400**
Dimensions (WxHxD) 159 x 159 x 76 mm

Technical data	PSS-024 A
Power supply	via. Bus cable PFK-200 (5V)
Power consumption all off	7mA
Power consumption all on	20mA
Connecting plug „SLAVE IN“	terminal strips 26-pin
Dimensions (WxHxD)	483 x 45 x 185 mm, 1 RU
Necessary installation depth	200mm
Weight	2,3kg

Bus module PBC-400 B

The PBC-400 B bus module is necessary in order to remove the program control panel PSS-024 A from the VARES-3000 main device PSS-224 C locally. It may be used remotely on any spot of the VARES-3000 bus.

Bus module **PBC-400 B**

Model designations

„VARES-3000“ Program Selector, 1 RU **PSS-024 A**
„VARES-3000“ Extension Cable, connecting cable for PEU-056 B and PSS-024 A **PFK-200**