
## RCS

## in 3 power classe 10/30/60W

PASSIV

ACTIVE



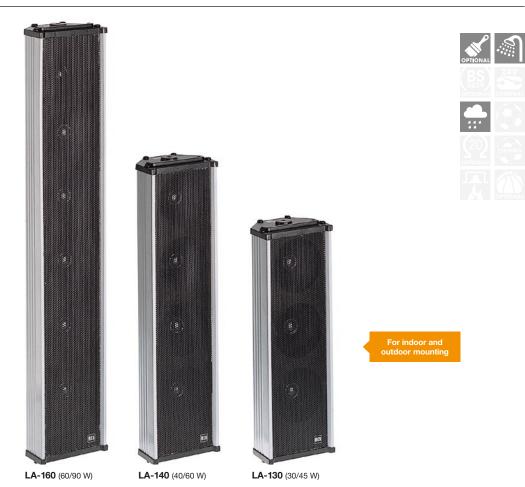

Liliiiii

The lobe-shaped sound dispersion characteristic enables excellent coverage of large areas with a relatively small number of column speakers.

Cast aluminium cover	
Inside thread 11/."	
Fixing screws	
Aluminium grille	
Extruded aluminium cabinet	
,Connecting cable (3-pin)	

## Description

This column speakers series is very strong and sturdily constructed. They are made of extruded aluminium with cast aluminium top and bottom covers.

The aluminium grille is stove enamelled. The columns are weather- and dust-proof and are very suitable for outdoor use, e. g. open-air theatres, stadiums and public parks

- All column speakers in this series are equipped with matching transformers for half and full power use.
- Because of their trapeze-shape, these speakers are very space saving and also suitable for corner installment.
- Supplied as standard with each of these speakers. Is complete swivel and tilt wall mounting kit.

Technical data	LA-130	LA-140	LA-160
Load rating (Music power)	30 W (45 W)	40 W (60 W)	60 W (90 W)
Transformer tappings at 100V	15 W – 30 W	20 W – 40 W	30 W – 60 W
Frequency range (Hz)	60 – 15.000 Hz	60 – 15.000 Hz	60 – 15.000 Hz
Sound pressure SPL Pmax/1m	113 dB	116 dB	118 dB
Speaker, installed	3 units	4 units	6 units
Dimensions, HxWxD (mm)	385 x 147 x 110 mm	575 x 147 x 110 mm	830 x 147 x 110 mm
Weight	approx. 4,5 kg	5,5 kg	6,0 kg
Colour	silver met./black		

## Model designations

Column Speakers, 30 W, (100 V), aluminium	<b>LA-130</b>
Column Speakers, 40 W, (100V), aluminium	<b>LA-140</b>
Column Speakers, 60 W, (100 V), aluminium	<b>LA-160</b>