

100V


2-Way-System

PASSIVE

ACTIVE



Rear view
active speaker




Description

This universally usable active loudspeaker system is especially well suited for multimedia applications, monitoring, conference rooms, educational institutions and similar areas.

One PBA-040 W set consists of a self-powered pair of stereo speakers including mounting brackets and connection cables

Please consider the following features:

- Digital stereo power amp module mounted into one box, the second box is designed as a passive slave, therefore only one power cable and one line level cable to the powered box are necessary.
- Sturdy housing made of ABS plastic with metal front grille and metal mounting bracket in white colour.
- Class D stereo power amp module with 2x 25 RMS at 8 ohms.

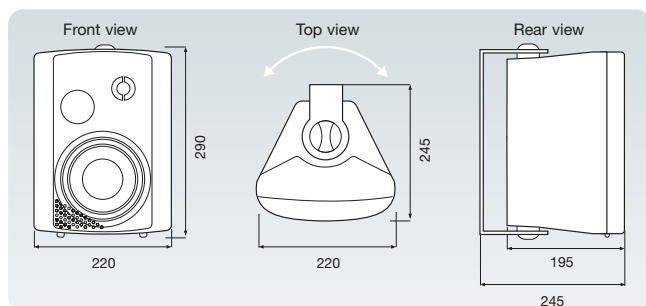

- Swivel mounting bracket and trapezoidal box shape allow versatile mounting in horizontal or vertical orientation on walls or under the ceiling.

★

Technical data	PBA-040 W
Load rating	2 x 40/25 W
Input sensitivity	-10 dBu / 10 kohms
Speaker type	active speaker pair 2-Way bass reflex; left Box with amplifier unit, right Box passive
Speaker	6" woofer, 1,5" tweeter
Amplifier unit	Volume controller on rear side; "ON" LED rear side; Signal LED for L and R on rear side
Frequency range	20 – 20.000 Hz / 1W, ±0.5dB
Treble control	±10dB
Bass control	±10dB
Spl 1w / 1m	92,9dB
Signal-to-noise ration	>95dB
Connections	Input cinch (stereo); jack 3,5 mm (stereo) or screw-type connectors L / R each 3-pin (bal.); Connection of left/right Box via 2-pin screw-type connectors
Power supply	AC 230 V, 50 / 60 Hz; IEC socket with included IEC power cable 1m
Dimensions H x W x D (mm)	290 x 220 x 245 mm
Weight (kg), Colour	10,1 kg (pair); white

Model designation

Active-Speaker-System, 2x 25 W PBA-040 W
Stereo speaker incl. mounting bracket