

100V


40W Adaptions
10/20/40W
2-Way-System

PASSIVE

ACTIVE



With swiveling
„eyeball tweeter“



Description

This 2-way fitted speaker with a very wide band woofer chassis and the new “eyeball” tweeter (patent) is of professional Hi-Fi quality.

The “eyeball” tweeter and grille can be tilted in every direction, by which the height emission can be driven in every direction.

Please consider the following features:


- Very practical and secure mounting with 6 quick-tightening clasps (theft save).
- Very attractive design (rim height only 3.5 mm), frame made of high-quality impact and scratch resistant plastic with a grille made of burn-in painted steel.
- High-quality 100V matching transformer for 1/1-1/2-1/3 performance, also lower ohm connection possible.
- The 2-way fitted speaker SC-400WT is suitable for high rooms with a medium disturbance level.



Installation case made of soaked chip-board for fitting the SC-400WT into ceilings, brick walls, concrete, etc.
Dimensions: 315 (H) x 233 (W) x 86 (D) in mm

Installation Case for SC-400WT ... **EZ-400**

- The installation case EZ-400 greatly improves the resonance.

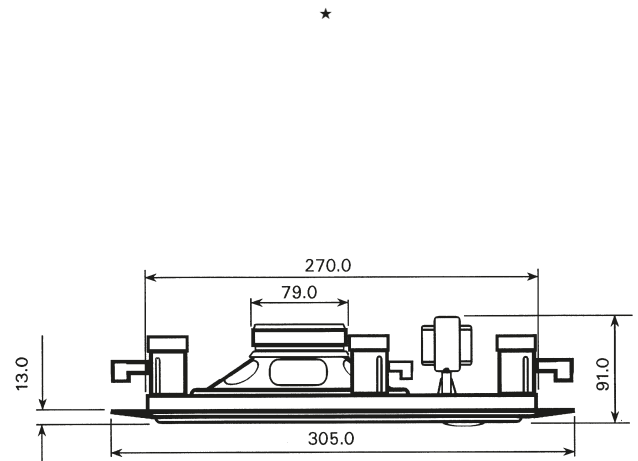

Necessary hole cut: 275 mm x 190 mm, ± 5 mm.

Technical data	SC-400 WT
Load rating (Music power)	40 W (60 W)
Transformer tapplings at 100 V	40 W – 20 W – 10 W
Frequency range	25 – 20.000 Hz
Sound pressure at 1W/1m	87,5 dB
Sound pressure SPL Pmax/1m	104 dB @1,2kHz
Angle of refl. beam (-6dB) 1/4/8 kHz	180°/ 90°/ 180°
Speaker	Woofer Ø 165 mm (8 ohms) + 1 Tweeter
Dimensions B x L x H	220 mm x 305 mm x 91 mm
Weight, Colour, Material	appr. 2.1 kg, white, plastic steel grille

2-way Ceiling Speaker, ... SC-400WT
white, with 100V-transformer, with „eyeball-tweeter“