

100V


20W Adaptors  
5/10/20W

broadband chassis



Certificat No.  
1438-CPR-0302/W

Under fire  
regulation

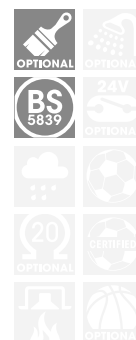

## Description

This alarming double direction speaker is tested by a notified product certification authority and certified to EN 54-24:2008.

This sound projector series fulfilled the requirements EN 54-24 and British standard BS 5839.

The loudspeaker is equipped with a two high-quality and very broadband twin cone speakers. The integrated 100V-transformer has the adjustments to 20 W – 10 W and 5 W.

Due to the excellent sound quality and dynamics, this sound projector is ideally suited for language reproduction as well as for a very good music performance.


This speaker is ideal for use in corridors, halls and underground garages. It is weatherproof certified for outdoor (Type B).

Two cable inlets for in / out allow looping to the next speaker.


Please consider the following features:

- The loudspeaker is in all-metal version.
- The color of the cover is white, similar to RAL 9010.
- The form and interior equipment of the sound projectors is configured, so that the favored polar pattern of the sound radiation is ensured.
- With ceramic terminals and thermal fuse.

★

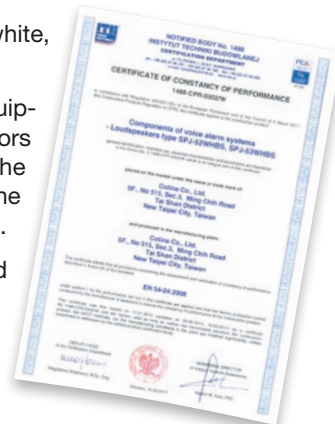

Technical data	SPJ-52 WHBS
Load rating (Music Power)	20 W (35 W)
Adaptors at 100V	20 / 10 / 5 W
Frequency range (±10dB)	120 – 20.000 Hz
Sound pressure 1 W/1 m	89 dB
Sound pressure SPL Pmax	101 dB
Angle of refl. beam (-6dB, 1 kHz/4 kHz)	130°/50°
Speaker Ø / Impedance	5", 8 ohms (2x)
Dimensions (without bracket)	Ø 140 x 207 mm
Material, Colour	Aluminium, white (RAL 9010)
Weight	approx. 3,3 kg

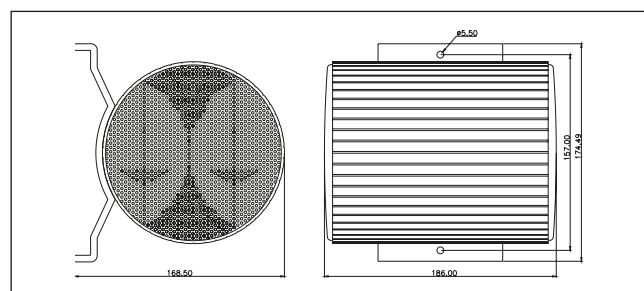

## Model designation

Double direction speaker.....**SPJ-52 WHBS**  
20 W, with 100V-transformer, white