



Description

The ZS-3 impedance meter measures the actual impedance of speakers and 100V speaker systems.

The measurement is carried out by a 1 kHz test generator and is displayed on a 4-digit LCD display. For measurements there are three different measuring ranges available: 0-20 ohms, 200 ohms and 2000 ohms.

The LCD display has a data hold function and displays it when the battery voltage becomes low. The device comes in a handy protective bag. Also included are test leads, the required mignon batteries and a device supplement with conversion table for power values.

Carrying and storage bag with accessories

High-quality processed vinyl fabric bag for storing the ZS-3. The measuring device is completely protected by the padding together with the supplied accessories in the bag.




There are 3 compartments in the carrying and storage bag, which provide enough space for the accommodation of measuring cables, measuring clamps, carrying strap and spare batteries.

Included with the ZS-3:

- Storage bag
- Digital impedance Tester with cover
- Two measuring cables with removable measuring terminals
- A shoulder strap
- 6 pieces of AA batteries

Please consider the following features:

- Digital display of the impedance
- For low-impedance speakers as well as for 100 V speakers
- Measuring ranges: 0-20 ohms, 200 ohms, 2000 ohms
- High measurement accuracy ($\pm 2\%$) through calibration
- Battery monitoring by display
- Protection and storage bag

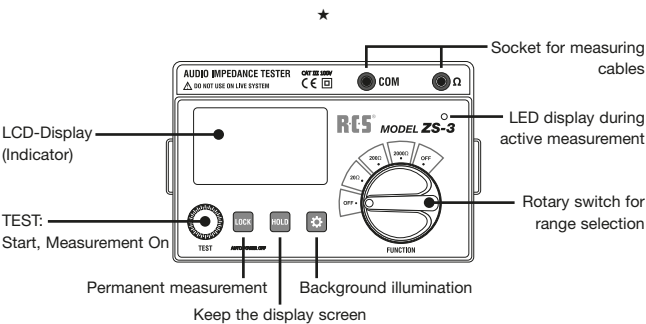

Technical data	ZS-3
Inputs	Banana plug
Measurement ranges	0-20 ohms, 0-200 ohms, 0-2000 ohms
Measurement accuracy	$\pm 2\%$
Test frequency	1 kHz
Power supply	6 x 1,5V AA battery
Dimensions and Weight	168x110x62 mm; 584g (incl. battery)

Model designation

Digital Impedance Tester, with accessories **ZS-3**