

19"-DAB INTERNET RADIO / MULTI-TUNER



Description

For music lovers, and friends of the digital listening pleasure. Experience crystal-clear radio and the variety of more than 20,000 radio stations and podcasts 8,000. If LAN or WLAN is not available, the device includes at the same time a DAB tuner, which allows terrestrial digital radio.

In addition to the radio function, the device has a USB interface. This allows you to play audio files on a USB stick, MP3 player or an external hard drive. Supported formats are AAC/AAC +, MP3, WMA and WAV.

In the very clearly arranged multilingual menu, you can edit your channel list, take equalizer settings or set up your Internet access (if available).

Please consider the following features:

- Multi-tuner to receive Internet radio, FM radio with RDS, DAB and DAB +.
- Easy setup of Internet Radio stations through clear country, transmitter and genre selection.
- Headphone output.


- Front panel auxiliary input for supplying external signals.
- 19" design (1 RU) for installation in system control centers.

★

An infrared remote control with key operating functions is included.



Technical data	DNT-400 DAB
FM tuning range	87,5 – 108 MHz
Antenna input FM	75 Ohms, coaxial
DAB-Frequency range L-Band	1452,96 – 1490,62 MHz
DAB-Frequency range Band III	175,928 – 239,2 MHz
USB-Version	1.1/2.0, FAT/FAT32
Audio output	Cinch, 0 dB, unbalanced
Audio frequency range	20 – 20.000 Hz
THD at 1kHz	0.3%
Signal-to-noise ratio	65dB
Dimensions (WxHxD)	483 x 44 x 150 mm (1 RU, 19")
Weight	2,8 kg

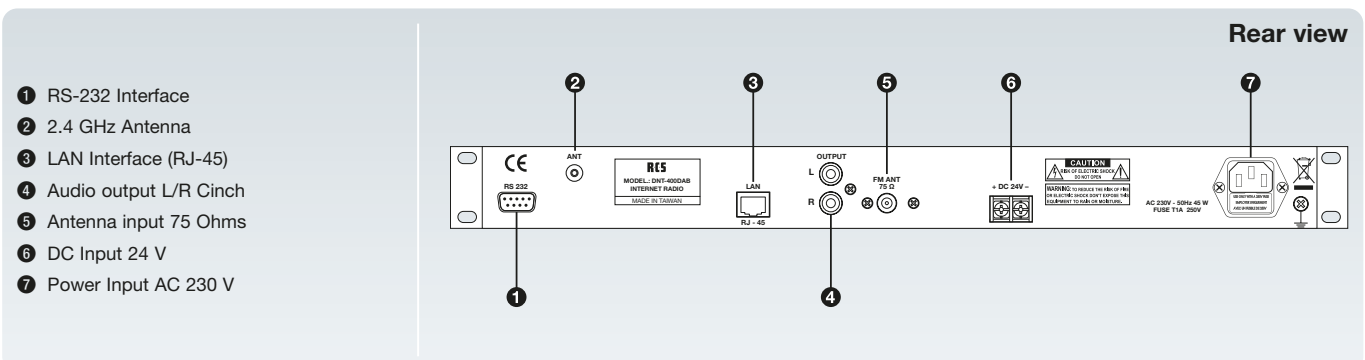

Model designation

19"-DAB Internet Radio Multi-Tuner, (1 RU) incl. Remote control **DNT-400 DAB**