

100V

10W Adaptions
1/3/5/10W



Horn Speaker, with 100V-transformer **DH-110S**

15W Adaptions
3/5/10/15W



Horn Speaker, with 100V-transformer **DH-115S**

30W Adaptions
3/5/10/15/30W



Horn Speaker, with 100V-transformer **DH-130S**

Description

Very stable and attractive horn speaker with integrated 100V matching transformer. This series is of high-quality plastic and therefore shock- and scratch-resistant.


The understated colouring, a industry-gray tone, blends in very well with the surroundings. Of course it is also possible to paint these horn speakers in all RAL colours.

The mounting bar is completely tiltable and therefore very easy to fit.

Please consider the following features:

- The complete construction of the horn speakers series has the ultimate protection grade, IP 66.
- The 3-pin connection cable (flexible hose line) is led through a waterproof PG-screw joint.
- The 6-step impedance is switchable with a screwdriver at the rear side of the unit.
- The horn speaker system is constructed to give an outstanding high sound pressure and best sound quality reproduction. The sound pressure is dependent on the different models and the particular impedance change-over.

★

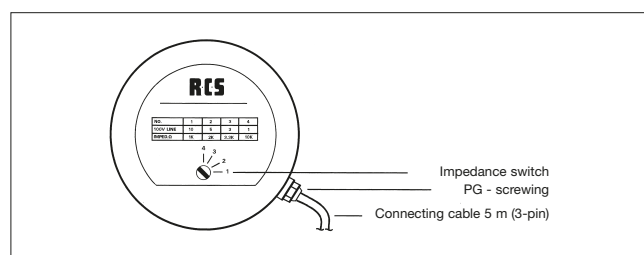

Technical data	DH-110S	DH-115S	DH-130S
Load rating	15/10 W	25/15 W	40/30 W
Nominal impedance	8 ohms	8 ohms	8 ohms
Transformer tapings at 100V	10 / 5 / 3 / 1 W	15 / 10 / 5 / 3 W	30/15/10/5/3 W
SPL at 1 W/ 1m	103 dB	105 dB	107 dB
SPL Pmax/1m	113 dB@1574Hz	117 dB@1130Hz	123 dB@1409Hz
Frequency range	350 – 6.000 Hz	300 – 6.000 Hz	250 – 6.000 Hz
Protection type	IP 66		
Weight	approx. 1,3 kg	approx. 1,5 kg	approx. 2,5 kg
Colour and Material	gray, plastic		
Dimensions, HxWxL (mm)	150 x 175 x 180	180 x 225 x 230	220 x 290 x 265